


Opaski kablowe UV

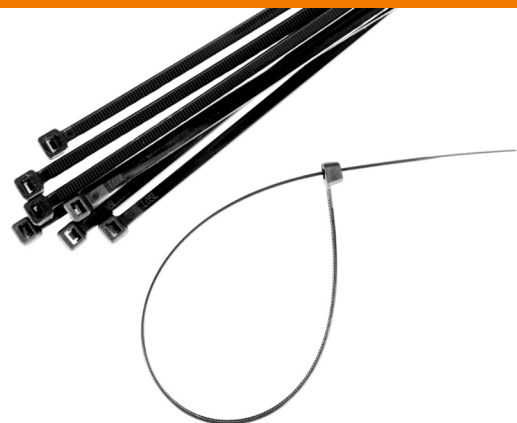

MATERIAŁ

100% nylon 66

TEMP. MONTAŻU

Od -20°C

WYTRZYMAŁOŚĆ DIELEKTRYCZNA

26kv/mm²

KOLOR

Czarny

TEMP. PRACY

-40°C do +85°C

PALNOŚĆ

UL-94 V2

ODPORNOŚĆ UV

ABSORPCJA WODY

2.4% (50% R.H., +23°C)

OPASKI KABLOWE

TYP				
	ROZMIAR AxB[mm]	ŚREDNICA [mm]	WYTRZYMAŁOŚĆ [kg]	OPAKOWANIE [szt]
OPK-100/25/C	100x2,5	20,5/3	8	100
OPK-150/25/C	150x2,5	36,5/3	8	100
OPK-200/25/C	200x2,5	52,5/3	8	100
OPK-200/48/C	200x4,8	49,5/3,5	23,4	100
OPK-250/48/C	250x4,8	65/3,5	23,4	100
OPK-300/48/C	300x4,8	81/3,5	23,4	100
OPK-350/48/C	350x4,8	97/3,5	23,4	100
OPK-400/48/C	400x4,8	113,2/3,5	23,4	100
OPK-450/48/C	450x4,8	129/3,5	23,4	100
OPK-500/48/C	500x4,8	145/3,5	23,4	100
OPK-300/76/C	300x7,6	76,4/8,5	55	100
OPK-350/76/C	350x7,6	98,5/8,5	55	100
OPK-400/76/C	400x7,6	114,5/8,5	55	100
OPK-450/76/C	450x7,6	130,5/8,5	55	100
OPK-500/76/C	500x7,6	146,5/8,5	55	100
OPK-550/76/C	550x7,6	162,5/8,5	55	100
OPK-610/88/C	610x8,8	181,5/8,5	81,6	100
OPK-760/88/C	760x8,8	229,5/8,5	81,6	100
OPK-920/88/C	920x8,8	280/8,5	81,6	100